


SmartGift WordClock

The essential functions at a glance.



This guide explains the most important functions of your WordClock.

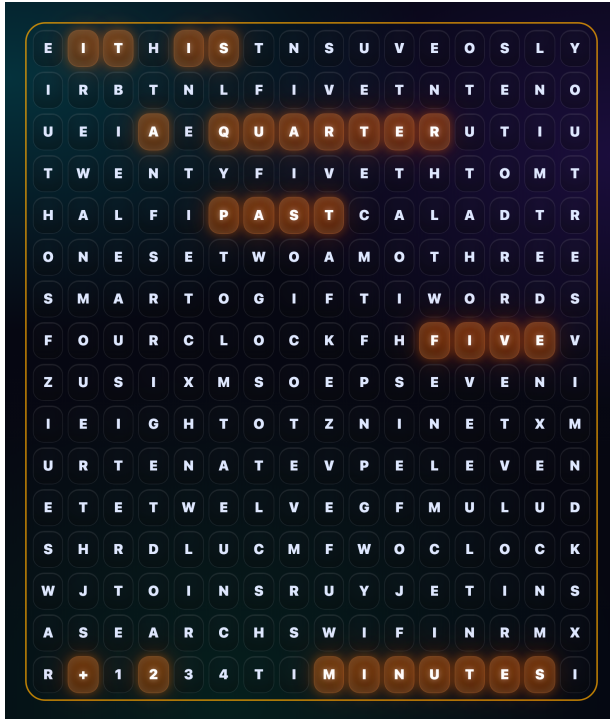


Latest documentation & support

Step 1 · Initial setup

Estimated time: 1 minute

On first startup, the WordClock creates its own Wi-Fi network and opens a small setup page for the home Wi-Fi connection.

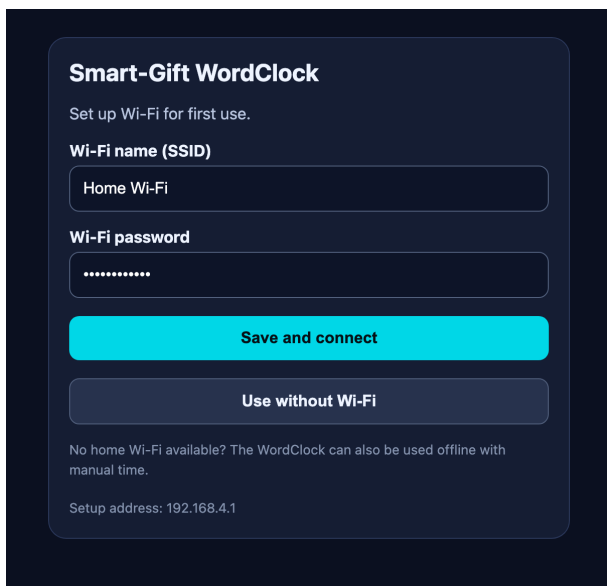The image shows a dark-themed setup screen for the Smart-Gift WordClock. At the top, it says "Smart-Gift WordClock" and "Set up Wi-Fi for first use." Below this, there are two input fields: "Wi-Fi name (SSID)" with the text "Home Wi-Fi" and "Wi-Fi password" with a series of dots. There are two buttons: a red "Save and connect" button and a grey "Use without Wi-Fi" button. At the bottom, there is a note: "No home Wi-Fi available? The WordClock can also be used offline with manual time." and the "Setup address: 192.168.4.1".

Smart-Gift WordClock

Set up Wi-Fi for first use.

Wi-Fi name (SSID)

Home Wi-Fi

Wi-Fi password

.....

Save and connect

Use without Wi-Fi

No home Wi-Fi available? The WordClock can also be used offline with manual time.

Setup address: 192.168.4.1

Steps


- Connect the USB power adapter.
- Connect to “Wordclock-Setup” using the password “12345678”.
- Open <http://192.168.4.1> and choose either home Wi-Fi or “Use without Wi-Fi”.
- For home Wi-Fi, enter the SSID and password and tap “Save and connect”.

Tip After a successful Wi-Fi connection, the new web address is displayed directly.

Step 2 · Time and interface language

Estimated time: 30 seconds

With home Wi-Fi, the time is normally synchronized automatically over the internet. Without home Wi-Fi, the WordClock can be operated completely with manual time.

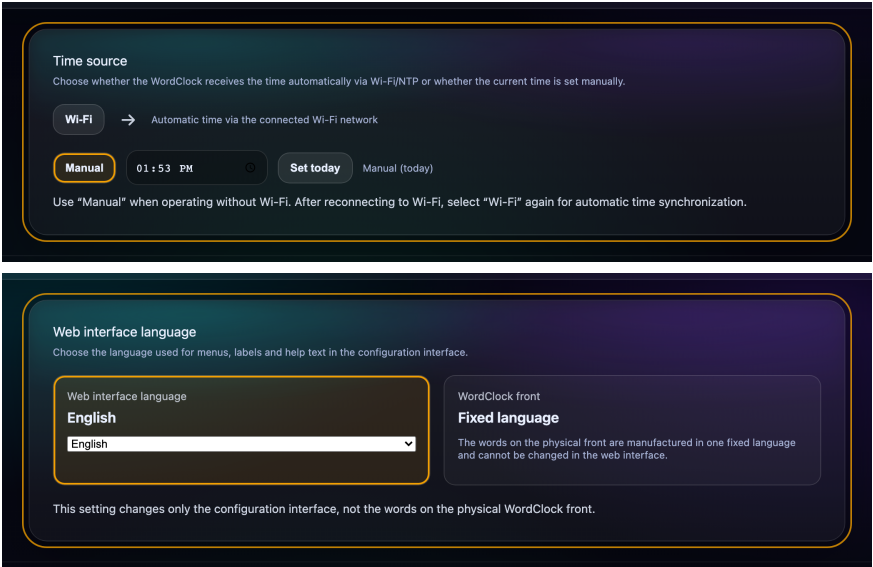

Steps



- Select “Wi-Fi” when the WordClock is connected to your home network.
- Without Wi-Fi, select “Manual”, set the current time and tap “Set today”.
- The language of the web interface can be changed at any time.

Tip In offline mode, the web interface remains available through Wordclock-Setup at <http://192.168.4.1>. The language of the physical front plate is fixed.

Step 3 · Display

Estimated time: 30 seconds

Adjust the clock color, brightness and background lighting to suit your room.

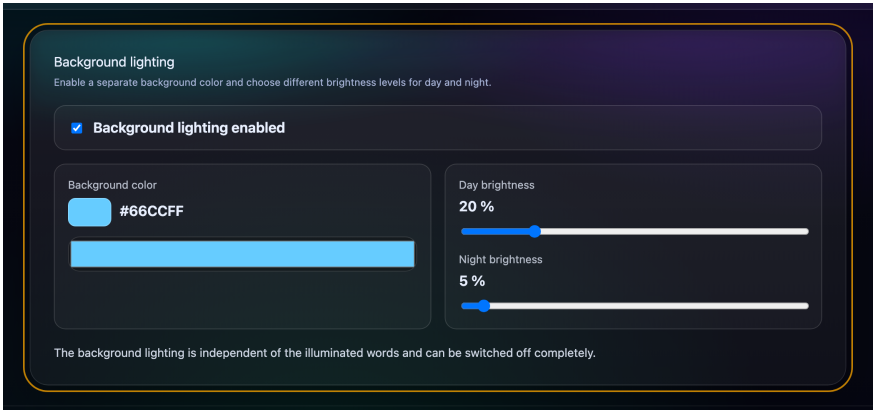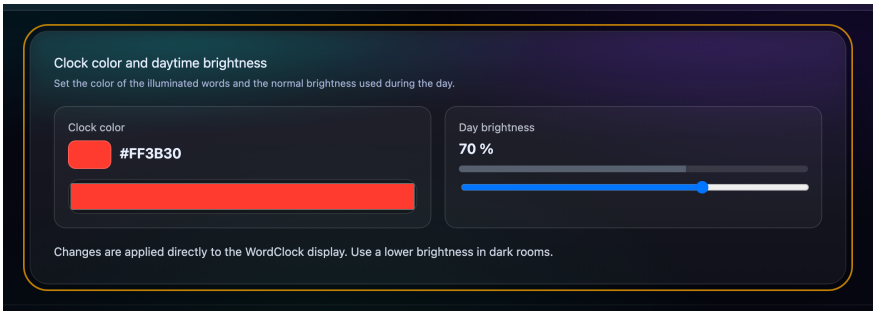

Steps


- Choose the clock color.
- Set the daytime brightness.
- Enable and adjust the background lighting if required.

Tip Changes are shown on the WordClock immediately.

Step 4 · Night mode

Estimated time: 30 seconds

At night, the display can be dimmed automatically or switched off completely.

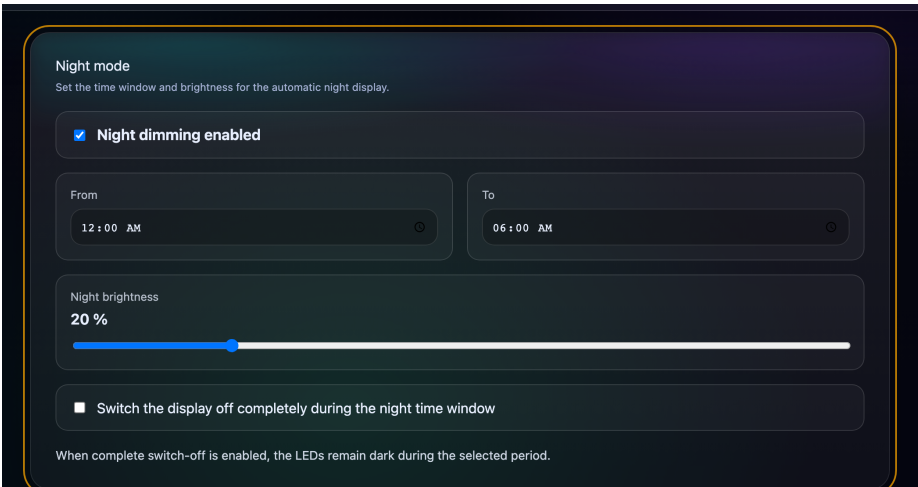

Steps


- Set the start and end times.
- Choose the night brightness.
- Optionally switch off the display during this period.

Tip A low brightness setting is usually sufficient in bedrooms.

Step 5 • Wi-Fi and setup

Estimated time: 1 minute

The initial setup is performed on the small setup page. Later, “Open setup again” can be used when Wi-Fi details need to be changed.

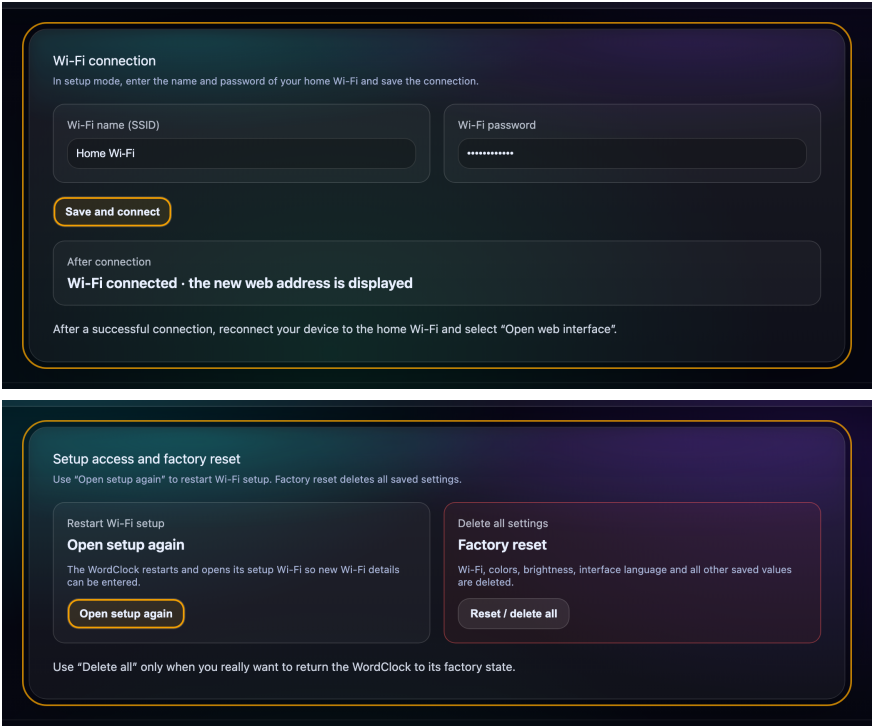

Steps


- In setup mode, enter your home Wi-Fi name and password and tap “Save and connect”.
- Alternatively choose “Use without Wi-Fi” for local operation with manual time.
- With Wi-Fi, after the new web address is shown, reconnect your device to the home Wi-Fi and open the web interface.
- Use “Open setup again” only when Wi-Fi needs to be configured again.

Tip Factory reset deletes all saved Wi-Fi and device settings.

Step 6 • Firmware update

Estimated time: 2 minutes

New functions and improvements can be installed directly through the firmware update page.

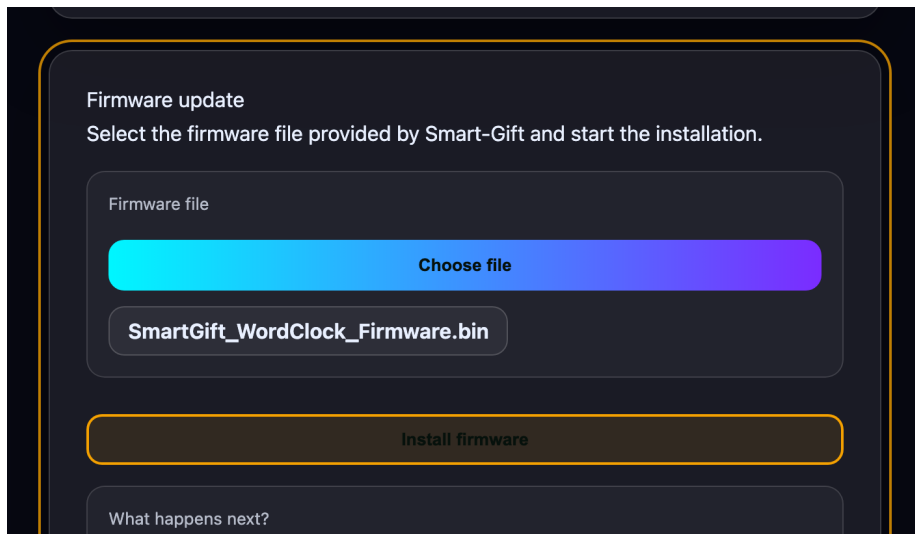

Steps

- Select the firmware file provided by Smart-Gift.
- Tap “Install firmware”. The button then shows that installation is running.
- Keep the WordClock connected to power until it restarts automatically.

Tip After a successful update, the WordClock restarts automatically and reconnects to Wi-Fi.

Step 7 · Help

Estimated time: —

The latest instructions and additional information are always available online.



Latest documentation & support

Steps

- Scan the QR code or open www.smart-gift.de/support.
- Support: kontakt@smart-gift.de

Tip The online version always contains the latest instructions.

Document 1.4 · Firmware INT 5.0.11 · Publisher 7.2.3 · 2026-08-06